



EXERCISES FOR COMPUTATIONAL TOOLS FOR DATA SCIENCE (02807)

WEEK 8: MINING SOCIAL NETWORK GRAPHS

For this exercise sheet we recommend installing and using the following Python libraries: *networkx*, *scikit-learn* and *matplotlib*.

For more information about *scikit-learn* and *matplotlib* see Exercise Sheet 7.

For information about *networkx* see: <https://networkx.org/>.

Exercise 1: Divisive clustering via Girvan–Newman

Implement a divisive hierarchical clustering algorithm via the Girvan–Newman method and compute modularity scores. Hence, you should implement the following parts:

1. Compute the betweenness centrality for every edge of a graph.
2. Implement a divisive hierarchical clustering algorithm based on removing edges with highest betweenness centrality and considering connected components as clusters.
3. Compute modularity for a clustering of a graph.

Test your implementations on the Karate-Club graph, found in *networkx.karate_club_graph*.


Compare your implementations with the ones from *networkx*:

- *networkx.algorithms centrality.edge_betweenness centrality*
- *networkx.algorithms community.girvan_newman*
- *networkx.algorithms community.modularity*

Use *matplotlib* to visualise the communities.

Exercise 2:

Consider the following graph G .

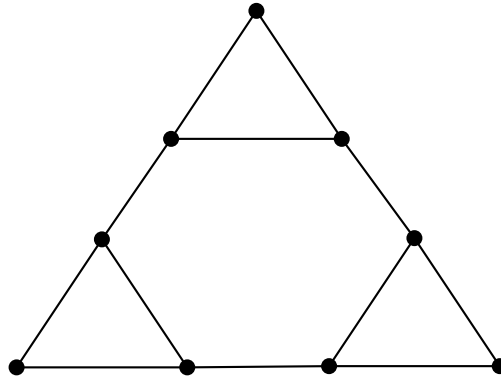

Compute the eigenvalues of the Laplacian matrix $L(G)$ of G .

(To compute eigenvalues you could use `numpy.linalg.eigvals` (you should import `numpy`).)

(If you use `networkx`, you could use `networkx.linalg.laplacianmatrix` to obtain the Laplacian matrix of G .)

Derive a bipartition of G via the second smallest eigenvalue of $L(G)$.

Compare your result with `SpectralClustering` from `sklearn.cluster` for 2 clusters. Experiment with `SpectralClustering`, e.g. by using more clusters or running it on the Karate-club graph from `networkx.karate_club_graph`.